



**LITTLE BEAVER®**  
EARTH DRILLS & AUGERS

# KWIK-TRENCH







**Kwik-Trench®**  
earth saw


The Kwik-Trench is an easy-to-use mini-trencher that delivers speed like no other, making it a durable and reliable choice for rental stores, contractors, golf course superintendents and anyone else who needs to do shallow trenching or tree root cutting.

The machine handles just about anything, from asphalt (2-inch) to road fill, compacted clay to roots 10 inches in diameter. When trenching, the high speed rotation reduces digging and backfill time by cutting clean narrow trenches to depths of a maximum of 8 to 12 inches, depositing soil on one side. It's available in two 40-inch-tall models: the KT200B is just 31 by 57.25 inches, and the KT2400B is 36 by 72.

With its compact size and push-forward operation, operators can maneuver the Kwik-Trench into areas full-size trenchers simply can't reach. It's ideal for shallow installations of sprinkler systems, low-voltage wiring, plumbing and drainage lines, as well as projects like root pruning, silt fencing and landscape edging.



## FEATURES AND BENEFITS

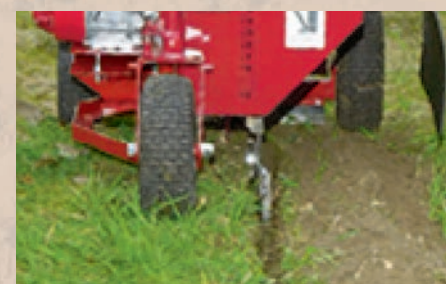

### FASTER TRENCHING

Quickly create neat, clean trenches with blade speeds up to 800 rpms and cutting speeds of up to 30 feet per minute.



### EASY BACKFILLING

Backfill easily with soil neatly deposited on one side of the trench.



### LESS TURF DAMAGE

Glide over delicate turf with pneumatic tires that eliminate damage caused by tracked machines or skid-steer type trenchers.



### EXCEPTIONAL POWER

The KT 200B features a Honda GX160 overhead valve engine (OHV) with 5.5 hp. The larger KT 2400B offers an 8 hp Honda GX240 OHV engine.



### ADJUSTABLE WIDTHS & DEPTHS

Change blades to cut trenches from 1 to 4 inches wide, and use the manual crank to control depths to a maximum of 8 to 12 inches.



### ENHANCED SAFETY

Prevent injury with the protective shroud that houses rotating components and a side shield that keeps flying debris contained.



### REDUCED WEAR

Prevent damage and excessive wear to the engine, drive train and teeth with the built-in slip clutch.




### GREATER DURABILITY

Enjoy long-lasting durability with cutter wheels that feature heat-treated, hardened steel teeth with carbide tips. Available with 1/2 inch shank (SBP) or 3/4 inch shank (rock teeth).




SPRINKLER INSTALLATION

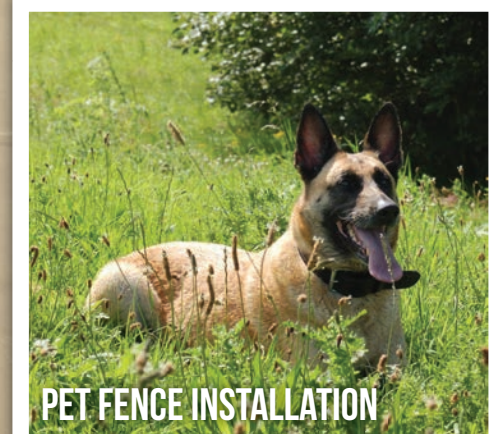

PET FENCE INSTALLATION



LANDSCAPE EDGING

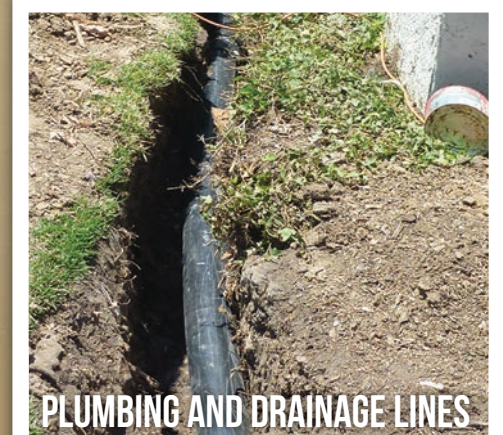

PLUMBING AND DRAINAGE LINES





## ACCESSORIES

### TILT BED UTILITY TRAILER



Quickly move from job to job with the optional tilt bed utility trailer. It's durable, easy to use and can handle the Kwik-Trench along with tools and supplies.

- 10-Gauge, Diamond-Plated Bed
- 1,000-lb Load Capacity
- Spring Axles
- Tilt Lock
- Tie-Downs
- Fits 2-inch Towing Ball

## SPECIFICATIONS

ENGINE		
	KT 200B	KT 2400B
BRAND / MODEL	Honda GX160 OHV	Honda GX240 OHV
POWER	5.5 hp (4.8 hp net)	8 hp (7.9 hp net)
OIL ALERT SYSTEM	Standard	Standard
STARTING	Recoil	Recoil
BLADE DRIVE	Triple V-belt	Triple V-belt with Automatic Tensioner
DIGGING WIDTH	1-3 in	1-4 in
MAXIMUM DIGGING DEPTH	8 in	12 in
DEPTH GAUGE	Standard	Standard
CUTTING TEETH (NUMBER)	KTSXRT - 4 KTSBP - 12	KTSXRT - 8 KTSBP - 16
CUTTING TEETH (TYPE)	Carbide Tipped	Carbide Tipped
LENGTH	57 1/4 in	72 in
WIDTH	31 in	36 in
HEIGHT	40 in	40 in
DRY WEIGHT	280 lbs	430 lbs

## CONTACT US

[www.littlebeaver.com](http://www.littlebeaver.com)

Little Beaver  
2009 South Houston  
Livingston, TX 77351

Phone: 800-227-7515  
Email: [sales@littlebeaver.com](mailto:sales@littlebeaver.com)  
Fax: 936-327-4025